


Fujifilm Digital Minilab Frontier 330 (SLP-800SC) Specifications

Type:	Floor-type, normal-light operation (input, laser printer, processor, cutter, sorter in one unit).	Processing capacity:	135: 3R/127 x 89 mm: Approx. 650 prints/hr. (using 127 mm width paper) 4R/152 x 102 mm: Approx. 570 prints/hr. (using 152 mm width paper)
Scanning section:	Area CCD.		Advanced Photo System (IX240): 16 rolls/hr. (3R C/H/P mixed-format prints; 25 exp. roll and index print); 15 rolls/hr. (4R C/H/P-mixed-format prints; 25 exp. roll and index print), (using 89mm (for 3R) and 102mm (for 4R) width paper)
Film carriers:	<ul style="list-style-type: none"> • Dual-format Interchangeable Film Auto Carrier (accepts 135F/H color negatives or Advanced Photo System (IX240)). • Manual carrier. • Semi-automatic Slide Carrier SC135A. 		
Image processing:	Optimal color reproduction processing, color gradation control, hyper-sharpness processing, hyper-tone processing, soft focus, facial expression enhancement, monotone finishing, red-eye correction processing, a variety of compositions (e.g. calendar prints, greeting cards, multi-prints) and others.	Media Prints:	With main controller: 3R / approx. 530 prints/hr. 4R / approx. 450 prints/hr. With Imaging Controller: (Meeting Fujifilm recommended specs) 3R / approx. 600 prints/hr. 4R / approx. 530 prints/hr.
Display:	15 or 17-inch CRT color display.		
Input light source:	LED.	FUJICOLOR CD Writing:	With main controller: 7 CDs/hr. 9 CDs/hr. (when two additional GPA 22 Boards are installed)
Printable films and sizes:	110, 126, 135F/H/full-panorama, Advanced Photo System (IX240), 120, 220.	(Single-scan digitization)	With Imaging Controller: (Meeting Fujifilm recommended specs) 18 CDs/hr. 24 CDs/hr. (when two additional GPA 22 Boards are installed)
Acceptable digital media:	Prints from ZIP™ disk, CD-R, MO disk, FD, FUJICOLOR CD, Digital still cameras (selected format), SmartMedia™, PC card, CompactFlash™, SD Memory card, Memory stick.		
Exposure system:	Scanning exposure system using RGB lasers (solid-state G and B lasers).	Print to print:	Available with optional software.
Print sizes:	89 x 89 mm ~ 203 x 305 mm, A4.	Processing time:	Dry to dry: 3 min. 40 sec.
Paper:	FUJICOLOR paper (Crystal Archive Paper Type ONE).	Processing chemicals:	Chemical system CP-48S.
Paper magazines:	Single paper magazine (standard accessory).	Power requirements:	AC200-240V (50/60Hz) 4.8KVA.
Expansion capability:	100-base Ether (connectivity to internal PC or from external PC for FDI port, USB ports, and RS232C port.	Dimensions:	1,520 (W) x 895 (D) x 1,636 (H) mm.
		Weight:	Approx. 500kg (550kg during actual operation).
		Installation space:	Approx. 1.2 m ² .

Dimensions

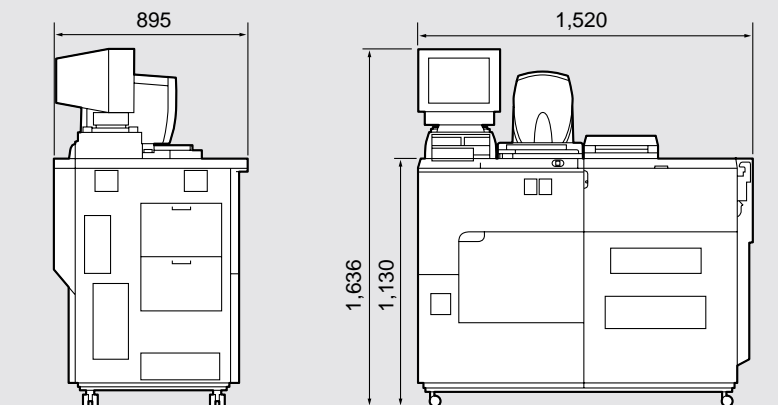

Unit: mm

(Illustrated display is the 15-inch model)

Specifications are subject to change without notice.
All brand names or trademarks are property of their respective owners.



The Frontier 330 receives the UL/CUL/CE Marks for meeting high safety standards.

FUJIFILM

FUJI PHOTO FILM CO., LTD.

26-30, NISHIAZABU 2-CHOME, MINATO-KU, TOKYO 106-8620, JAPAN